


Amplification Chart

V5.1

Distribution Date
May 4th, 2021

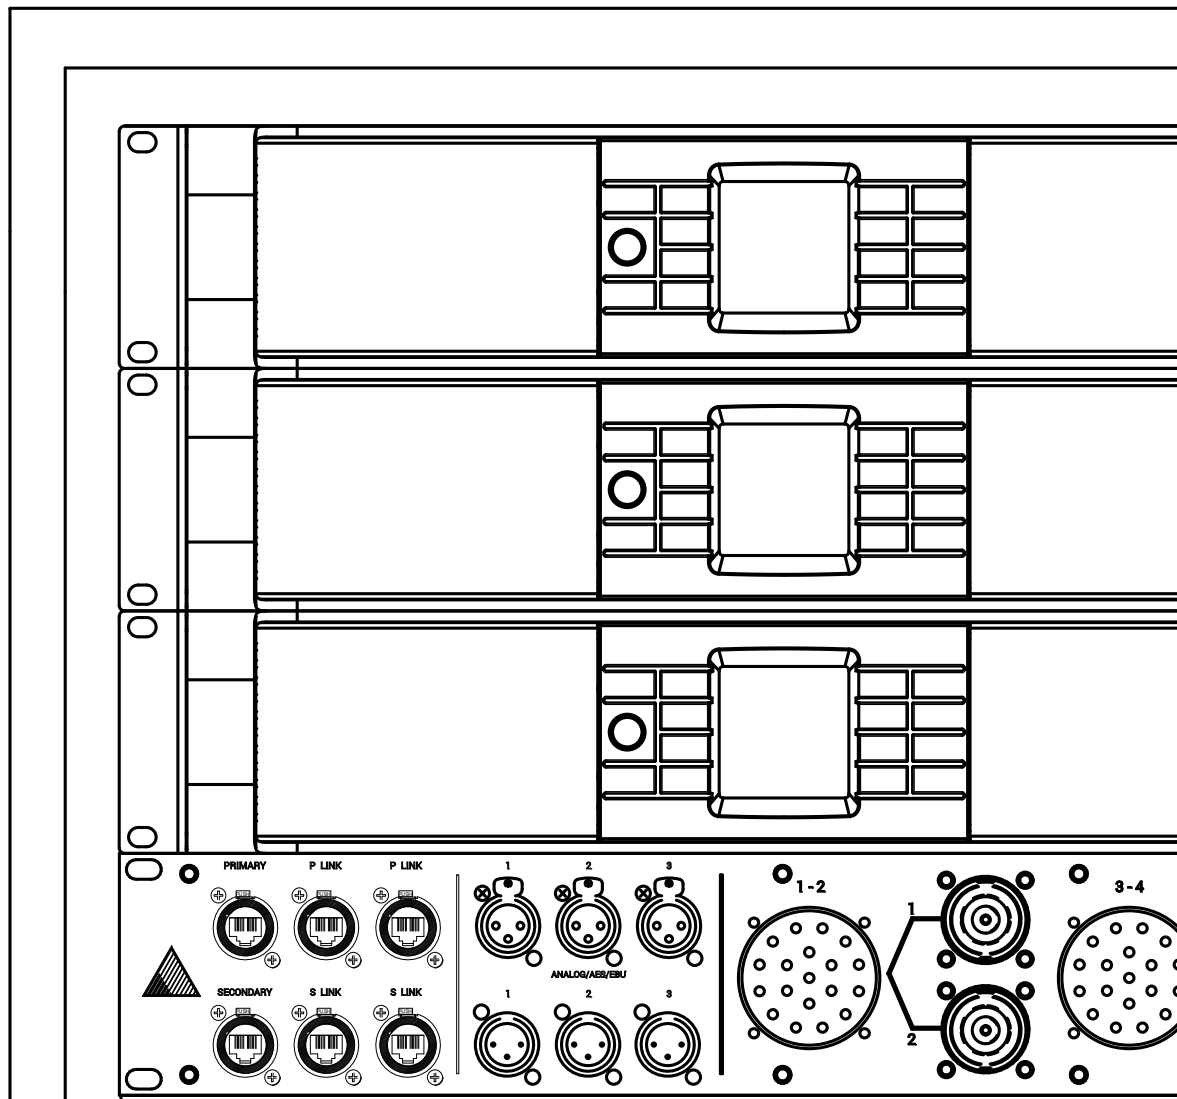

Adamson Amplification Chart V5.1



Maximum Cabinet Count per Amplifier

- The following charts presume amplifiers running on 208 / 230 V for maximum performance. Lower mains voltage can reduce available headroom.
- Maximum recommended speaker cable length per circuit 100 ft / 30 m, with minimum AWG 11 / 4 mm² wires. Extended length or reduced section can reduce performance.

Family	Product	Channels Used	PLM20K44 / D200:4		PLM12K44 / D120:4	
			# Per Circuit	# Per Amp	# Per Circuit	# Per Amp
E-Series	E15	4	3	3	N/A	N/A
	E12	4	3	3	N/A	N/A
	E219	2	2	3 *	N/A	N/A
	E119	1	2	6 *	N/A	N/A
S-Series	S10 / S10n	2	4	8	4	8
	S119	1	2	8	2	4
	S7	2	4	8	4	8
	S118	1	4	16	4	12
	S10p	2	4	8	4	8
	S7p (Bi-Amped)	2	4	8	4	8
	S7p (Passive)	1	3	12	3	12
IS-Series	IS10 / IS10n	2	4	8	4	8
	IS119	1	2	8	2	4
	IS7	2	6	12	6	12
	IS118	1	4	16	4	12
	IS10p	2	4	8	4	8
	IS7p	2	4	8	4	8
	IS7px	1	3	12	3	12
	IS219	2	1	3	N/A	N/A
M-Series	M15A	2	3	6	3	6
	M15P	1	3	12	3	10
	M12A	2	3	6	3	6
	M12P	1	3	12	3	10
	M215	2	2	4	2	4
	M212	2	2	4	2	4

* The use of eight SD19 drivers per amp requires 208 / 230 V mains voltage operation. Depending on source material it may reduce headroom and will increase thermal load. It is not recommended for sustained maximum output applications. Please contact Adamson support in case of any questions.

Adamson Amplification Chart V5.1



Maximum Cabinet Count per Amplifier

Family	Product	Channels Used	PLM20K44 / D200:4		PLM12K44 / D120:4	
			# Per Circuit	# Per Amp	# Per Circuit	# Per Amp
Point Series	P8P	1	4	16	4	16
	P12A	2	3	6	3	6
	P12P	1	3	12	3	10
	P15A	2	3	6	3	6
	P15P	1	3	12	3	10
	P115P + P8P	1	1	4	1	4
	P115A	1	4	16	3	12
	P215	1	2	8	2	6
	A218	1	2	6	2	4
Point Concentric Series	PC5	1	2	8	2	8
	PC6	1	3	12	3	12
	PC8	1	2	8	2	8
	PC10	1	2	8	2	8
	PC12	1	2	8	2	8
Legacy Products	E218	2	3	6	N/A	N/A
	Y18	4	2	2	2	2
	Y10 / Y10K	4	4	4	4	4
	T21	2	1	2	N/A	N/A
	SX18A	3	4	4	4	4
	SX18P	2	4	8	4	8
	MTX / MTXW	2	8	16	8	12
	MTB	1	2	8	2	6
	SPK / SPKW	3	4	4	4	4
SPB	1	2	6	2	5	

Adamson Amplification Chart V5.1



Maximum Cabinet Count per Amplifier

Family	Product	Channels Used	D80:4		PLM 5K44		D40:4	
			# Per Circuit	# Per Amp	# Per Circuit	# Per Amp	# Per Circuit	# Per Amp
E-Series	E15	4	N/A	N/A	N/A	N/A	N/A	N/A
	E12	4	N/A	N/A	N/A	N/A	N/A	N/A
	E219	2	N/A	N/A	N/A	N/A	N/A	N/A
	E119	1	N/A	N/A	N/A	N/A	N/A	N/A
S-Series	S10 / S10n	2	4	5	N/A	N/A	N/A	N/A
	S119	1	1	3	N/A	N/A	N/A	N/A
	S7	2	4	6	N/A	N/A	N/A	N/A
	S118	1	2	8	N/A	N/A	N/A	N/A
	S10p	2	4	5	N/A	N/A	N/A	N/A
	S7p (Bi-Amped)	2	4	6	N/A	N/A	N/A	N/A
	S7p (Passive)	1	3	8	N/A	N/A	N/A	N/A
IS-Series	IS10 / IS10n	2	4	5	N/A	N/A	1	2
	IS119	1	1	3	N/A	N/A	N/A	N/A
	IS7	2	6	8	N/A	N/A	2**	4**
	IS118	1	2	8	N/A	N/A	1	2
	IS10p	2	3	4	N/A	N/A	1	2
	IS7p	2	4	8	N/A	N/A	2	3
	IS7px	1	3	8	N/A	N/A	1	4
	IS219	2	N/A	N/A	N/A	N/A	N/A	N/A
M-Series	M15A	2	3	6	1	2	1	2
	M15P	1	3	6	1	4	1	3
	M12A	2	3	6	1	2	1	2
	M12P	1	3	6	1	4	1	3
	M215	2	2	3	N/A	N/A	N/A	N/A
	M212	2	2	3	N/A	N/A	N/A	N/A

** LF headroom reduced by 2 dB. Only recommended for fill applications.

Adamson Amplification Chart V5.1



Maximum Cabinet Count per Amplifier

Family	Product	Channels Used	D80:4		PLM 5K44		D40:4	
			# Per Circuit	# Per Amp	# Per Circuit	# Per Amp	# Per Circuit	# Per Amp
Point Series	P8P	1	4	14	2	8	2	6
	P12A	2	3	6	1	2	1	2
	P12P	1	2	8	1	4	1	3
	P15A	2	3	6	1	2	1	2
	P15P	1	2	8	1	4	1	3
	P115P + P8P	1	1	4	1	4	1	3
	P115A	1	3	8	1	4	1	4
	P215	1	2	4	N/A	N/A	N/A	N/A
	A218	1	2	3	N/A	N/A	N/A	N/A
Point Concentric Series	PC5	1	2	8	2	8	2	8
	PC6	1	3	12	3	12	3	12
	PC8	1	2	8	1	4	1	4
	PC10	1	2	8	1	4	1	4
	PC12	1	2	8	1	4	1	4
Legacy Products	E218	2	N/A	N/A	N/A	N/A	N/A	N/A
	Y18	4	1	1	N/A	N/A	N/A	N/A
	Y10 / Y10K	4	2	2	N/A	N/A	N/A	N/A
	T21	2	N/A	N/A	N/A	N/A	N/A	N/A
	SX18A	3	3	3	2	2	1	1
	SX18P	2	3	4	1	2	1	2
	MTX / MTXW	2	8	12	3	6	3	6
	MTB	1	2	4	N/A	N/A	N/A	N/A
	SPK / SPKW	3	4	4	2	2	2	2
	SPB	1	2	3	N/A	N/A	N/A	N/A

Adamson Amplification Chart V5.1



Maximum Cabinet Count per Amplifier

Family	Product	Channels Used	PLM 10000Q		PLM 20000Q		IPD 2400	
			# Per Circuit	# Per Amp	# Per Circuit	# Per Amp	# Per Circuit	# Per Amp
E-Series	E15	4	N/A	N/A	3	3	N/A	N/A
	E12	4	N/A	N/A	3	3	N/A	N/A
	E219	2	N/A	N/A	2	3*	N/A	N/A
	E119	1	N/A	N/A	2	6*	N/A	N/A
S-Series	S10 / S10n	2	3	6***	4	8***	N/A	N/A
	S119	1	1	4	2	8	N/A	N/A
	S7	2	3	6***	4	8***	N/A	N/A
	S118	1	3	12	4	16	N/A	N/A
	S10p	2	3	6	4	8	N/A	N/A
	S7p (BiAmp)	2	3	6	4	8	N/A	N/A
	S7p (Passive)	1	3	10	3	12	N/A	N/A
IS-Series	IS10	2	3	6***	4	8***	N/A	N/A
	IS119	1	1	4	2	8	N/A	N/A
	IS7	2	N/A	N/A	6	12***	N/A	N/A
	IS118	1	3	12	2	8	N/A	N/A
	IS10p	2	3	6	4	8	N/A	N/A
	IS7p	2	3	6	4	8	N/A	N/A
	IS7px	1	3	10	3	12	N/A	N/A
	IS219	2	N/A	N/A	1	3	N/A	N/A
M-Series	M15A	2	2	4	3	6	N/A	N/A
	M15P	1	2	8	3	12	N/A	N/A
	M12A	2	2	4	3	6	N/A	N/A
	M12P	1	2	8	3	12	N/A	N/A
	M215	2	1	2	2	4	N/A	N/A
	M212	2	1	2	2	4	N/A	N/A

* The use of eight SD19 drivers per amp requires 208 / 230 V mains voltage operation. Depending on source material it may reduce headroom and will increase the thermal load. It is not recommended for sustained maximum output applications. Please contact Adamson support in case of any questions.

*** Only one processing module available. All cabinets are driven from the same input signal.

Adamson Amplification Chart V5.1



Maximum Cabinet Count per Amplifier

Family	Product	Channels Used	PLM 10000Q		PLM 20000Q		IPD 2400	
			# Per Circuit	# Per Amp	# Per Circuit	# Per Amp	# Per Circuit	# Per Amp
Point Series	P8P	1	4	16	4	16	1	2
	P12A	2	3	6	3	6	1	1
	P12P	1	3	10	3	12	1	2
	P15A	2	3	6	3	6	1	1
	P15P	1	3	10	3	12	1	2
	P115P + P8P	1	1	4	1	4	1	2
	P115A	1	3	12	4	16	1	2
	P215	1	1	4	2	8	N/A	N/A
	A218	1	1	4	2	6	N/A	N/A
Point Concentric Series	PC5	1	2	8	2	8	1	2
	PC6	1	3	12	3	12	2	4
	PC8	1	2	8	2	8	1	2
	PC10	1	2	8	2	8	1	2
	PC12	1	2	8	2	8	1	2
Legacy Products	E218	2	N/A	N/A	3	6	N/A	N/A
	Y18	4	2	2	2	2	N/A	N/A
	Y10 / Y10K	4	4	4	4	4	N/A	N/A
	T21	2	N/A	N/A	1	2	N/A	N/A
	SX18A	3	3	3	4	4	N/A	N/A
	SX18P	2	3	6	4	8	N/A	N/A
	MTX / MTXW	2	6	12	8	16	N/A	N/A
	MTB	1	1	4	2	8	N/A	N/A
	SPK / SPKW	3	4	4	4	4	N/A	N/A
	SPB	1	1	4	2	8	N/A	N/A

© 2021 Adamson Systems Engineering. All rights reserved.

No part of this publication may be reproduced or transmitted in any form or by any means without the written permission of the publisher.

Released on May 4th, 2021, replacing all previously released versions of this document.